


Installation of HeatMoni Spot

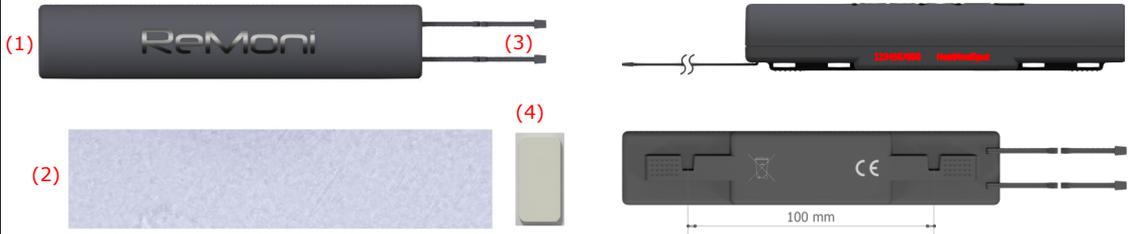

1. Make sure you have everything in the picture.


- (1) HeatMoni Spot, 1 pcs.
- (2) Alutape, 2 pcs.
- (3) Factory mounted probes, 2 pcs.
- (4) Adhesive pad, 1 pcs.

2. Locate the HeatMoni Spot ID on the unit.
(As seen in red above).

Log in to ReMoni's online portal:
ReCalc.ReMoni.com and register the unit.

The HeatMoni Spot can be mounted on the wall using the mounting holes, the distance is 100 mm (see picture). Alternatively, on a clean surface using the adhesive pad. Mount near the pipe in the same room as the probes.

Do not mount the HeatMoni Spot in direct sunlight or near external temperature sources. This ensures that the HeatMoni Spot has the same air temperature as the measured pipes.

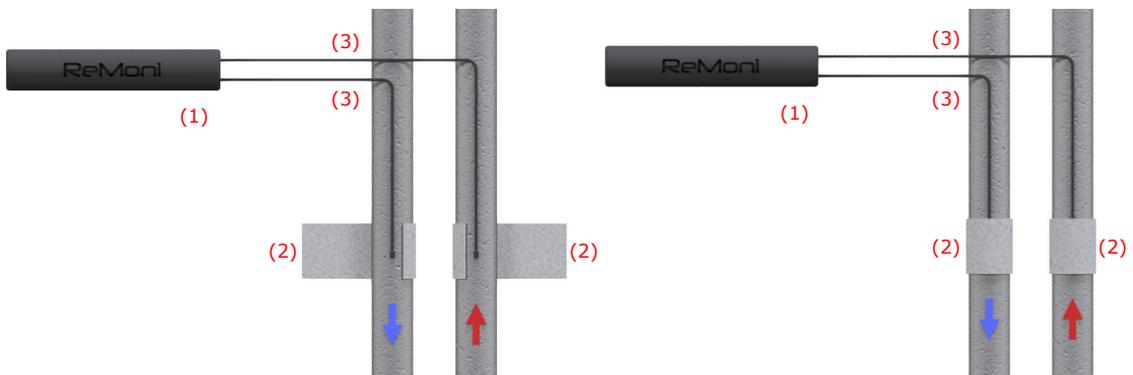

3. Tape the probes to the uninsulated pipes to be measured. The probes must be mounted so that they are not affected by external temperatures:

- i. Mount at least 25 cm from larger pipe braids so they are not influenced by the flow in other pipes.
- ii. Mount at least 25 cm from other temperature sources that can affect the sensor with heat or cold.

4. The HeatMoni Spot is now installed.

Note that it is possible to extend the probes by up to 10 meters.

Please note - It is recommended to install the ReMoni gateway before the HeatMoni Spot. For outdoor installation, turn the sensor with the probes downwards, to avoid water entering from above.

After connecting the HeatMoni Spot, it can take up to 60 minutes before the measured values are visible on ReMoni's online portal ReCalc.ReMoni.com.
Datasheets can be found on ReMoni's website: ReMoni.com.

Images are indicative and are subject to errors and changes.

Revised: April 2018