

Installation of Gateway

1. Assemble

Assemble the ReMoni Gateway. Do not turn the power on yet.



2. Connect


Connect the Gateway to the internet by one of the following options:

- a - Ethernet
- b - WiFi
- c - Data dongle



2a. Ethernet

1. Connect the ethernet cable to the Gateway.
2. Turn on the power to the Gateway.

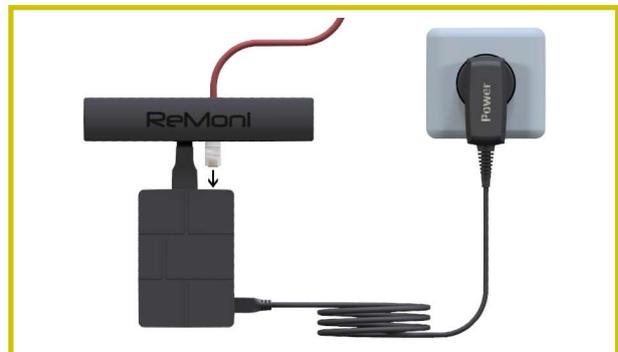

2b. WiFi

1. Turn on the power to the Gateway and wait for about 60 seconds.
2. Connect a smartphone, tablet or PC to the WiFi network (SSID) named ReMoni_Gateway.
3. A browser window for the WiFi installation will popup.*
4. Follow the on-screen instructions.


* If the window doesn't appear, make sure that you're connected to the network ReMoni_Gateway. If you are connected to the ReMoni_Gateway WiFi and the browser window still doesn't popup, open your browser and type the IP address: 192.168.42.1 in the top address bar.



Installation of Gateway

2c. Data dongle

1. Connect the data dongle to the Gateway.
2. Turn on the power to the Gateway.

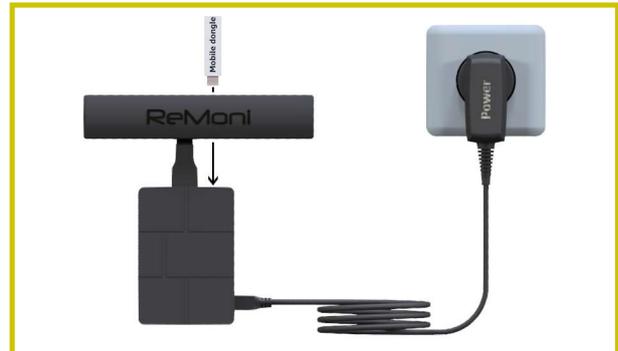


If the Gateway is connected to more than one network it prioritises the connections by order:

1. Ethernet
2. WiFi
3. Data dongle

3. ReCalc

Log in to ReCalc: recalc.remoni.com and register the Gateway with the AccessPoint ID located on the AccessPoint.



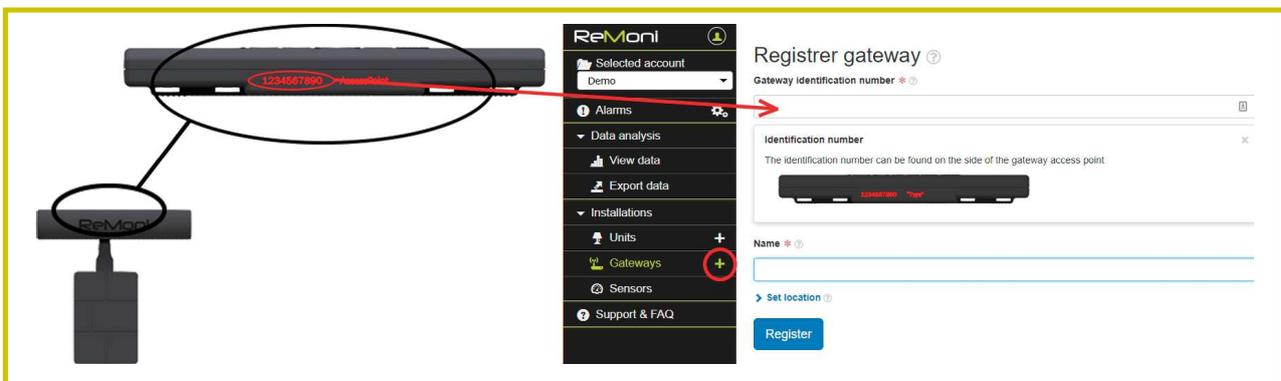


Attention: The best signal is obtained when the Gateway is minimum 1 meter above the ground.
Data sheets can be found on ReMoni's website: remoni.com.

Troubleshooting of Gateway



On the bottom of the gateway there is two light diodes, one red and one green. These diodes can help you determine what the error is, by looking at the table below.

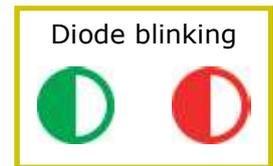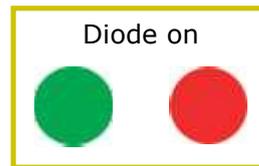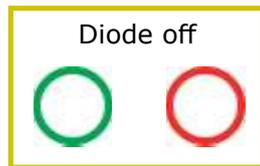

Lights	Description
	Everything works, the Gateway has an internet connection and the AccessPoint is correctly attached.
	There is no connection to the internet, but the AccessPoint works.
	There is an error between the Raspberry Pi and the Accesspoint or the Accesspoint is not connected. There is however connection to the internet.
	There is an error between the Raspberry Pi and the Accesspoint or the Accesspoint is not connected, plus there is no connection to the internet.
	The Gateway is missing power.
	The SD-card is not inserted in the Raspberry Pi.

Please visit our knowledge center at: support.remoni.com for further guides and help.